


- NOTES:
1. SLASH (/) AT A POINT IN THE CIRCUIT INDICATES AN ACTIVE LOW AT STANDBY.
 2. XXXX DENOTES WIRE COLOR, REFER FOR DETAILED IDENTIFICATION.
 3. (RC) & (LC) INDICATES TERMINAL DESIGNATION ON RIGHT AND LEFT HAND CONNECTOR TO THE MATRIX BOARD, RESPECTIVELY. LETTERS OR NUMBERS FOLLOWING THIS DESIGNATION ARE PIN NUMBERS.
 4. ON 2 PAY; JUMPER "D" TO "C"; ON 3 PAY; JUMPER "A" TO "B" AND "C" (POLARITY AS SHOWN) BETWEEN "E" AND "D" RESPECTIVELY. REFER TO DWG. 78-98D SHEET 2.


INDICATES AN
 DWG. 07-06-1B
 LOCATION ON RIGHT
 LOGIC BOARD,
 S FOLLOWING

DIODE IN914
 C AND "D" & "C"
 9 SHEET 2.

3 and 5 line SHEET 1A

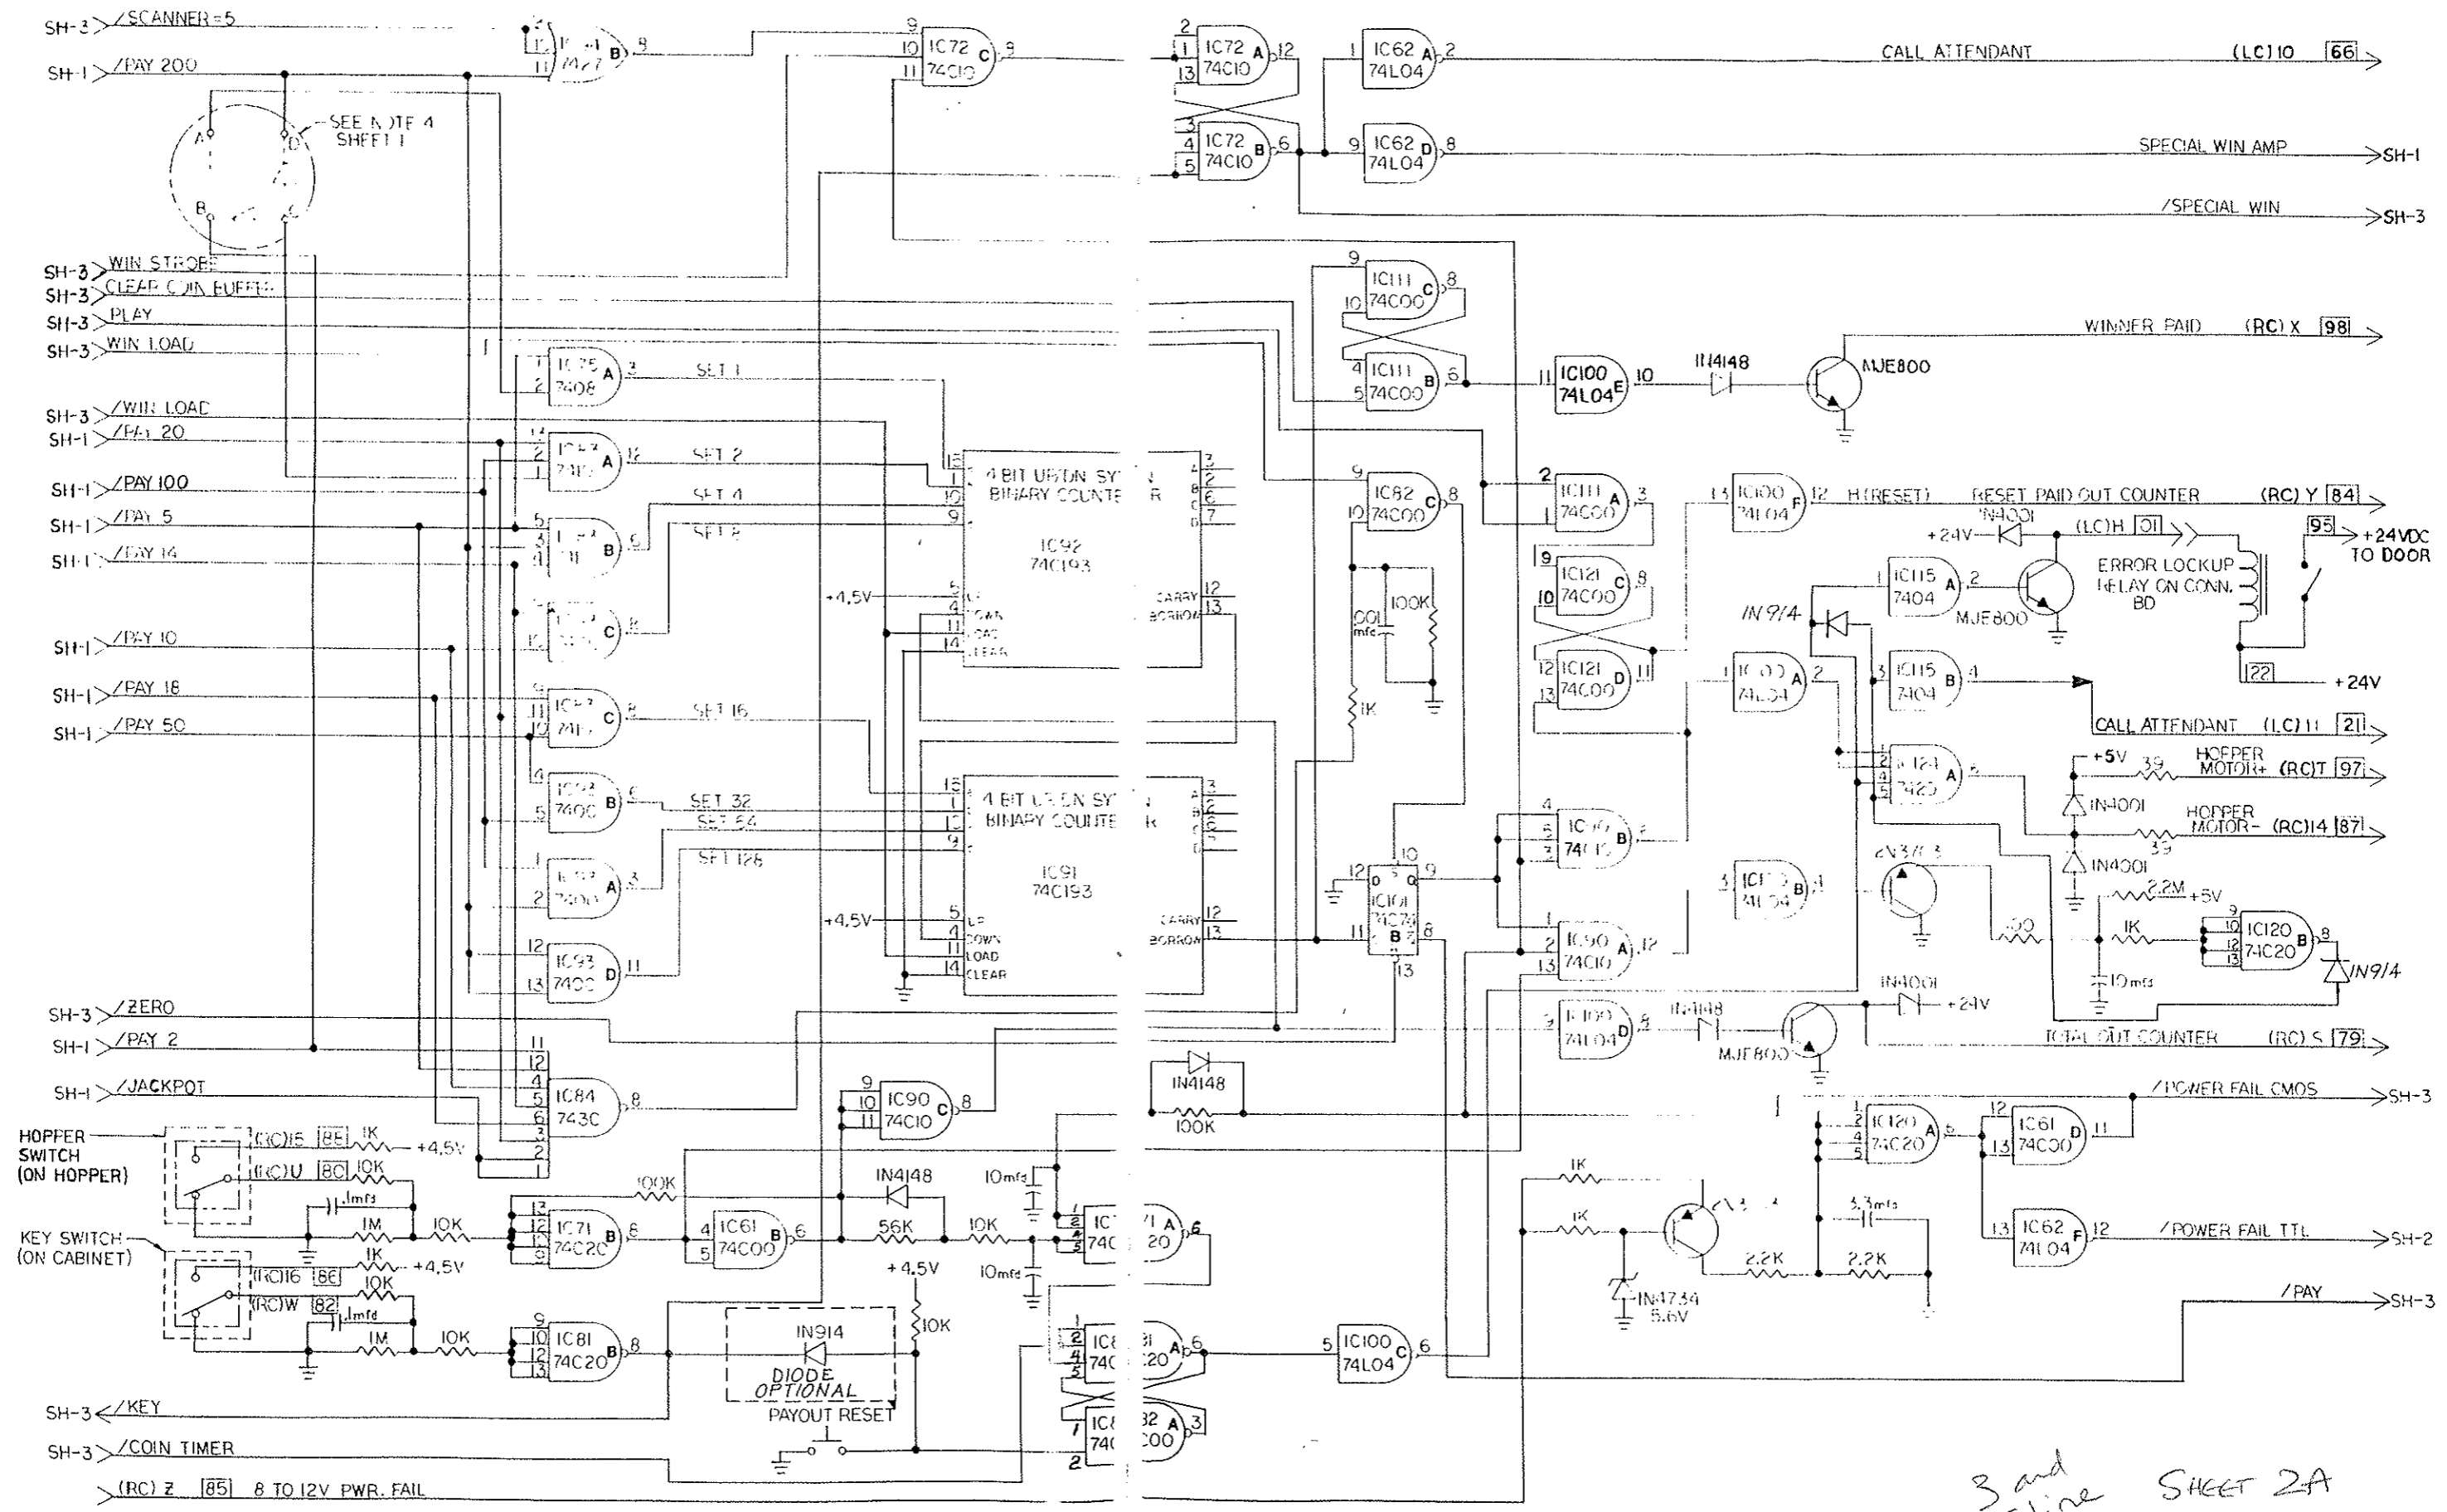

3 and 5 line SHEET 2A

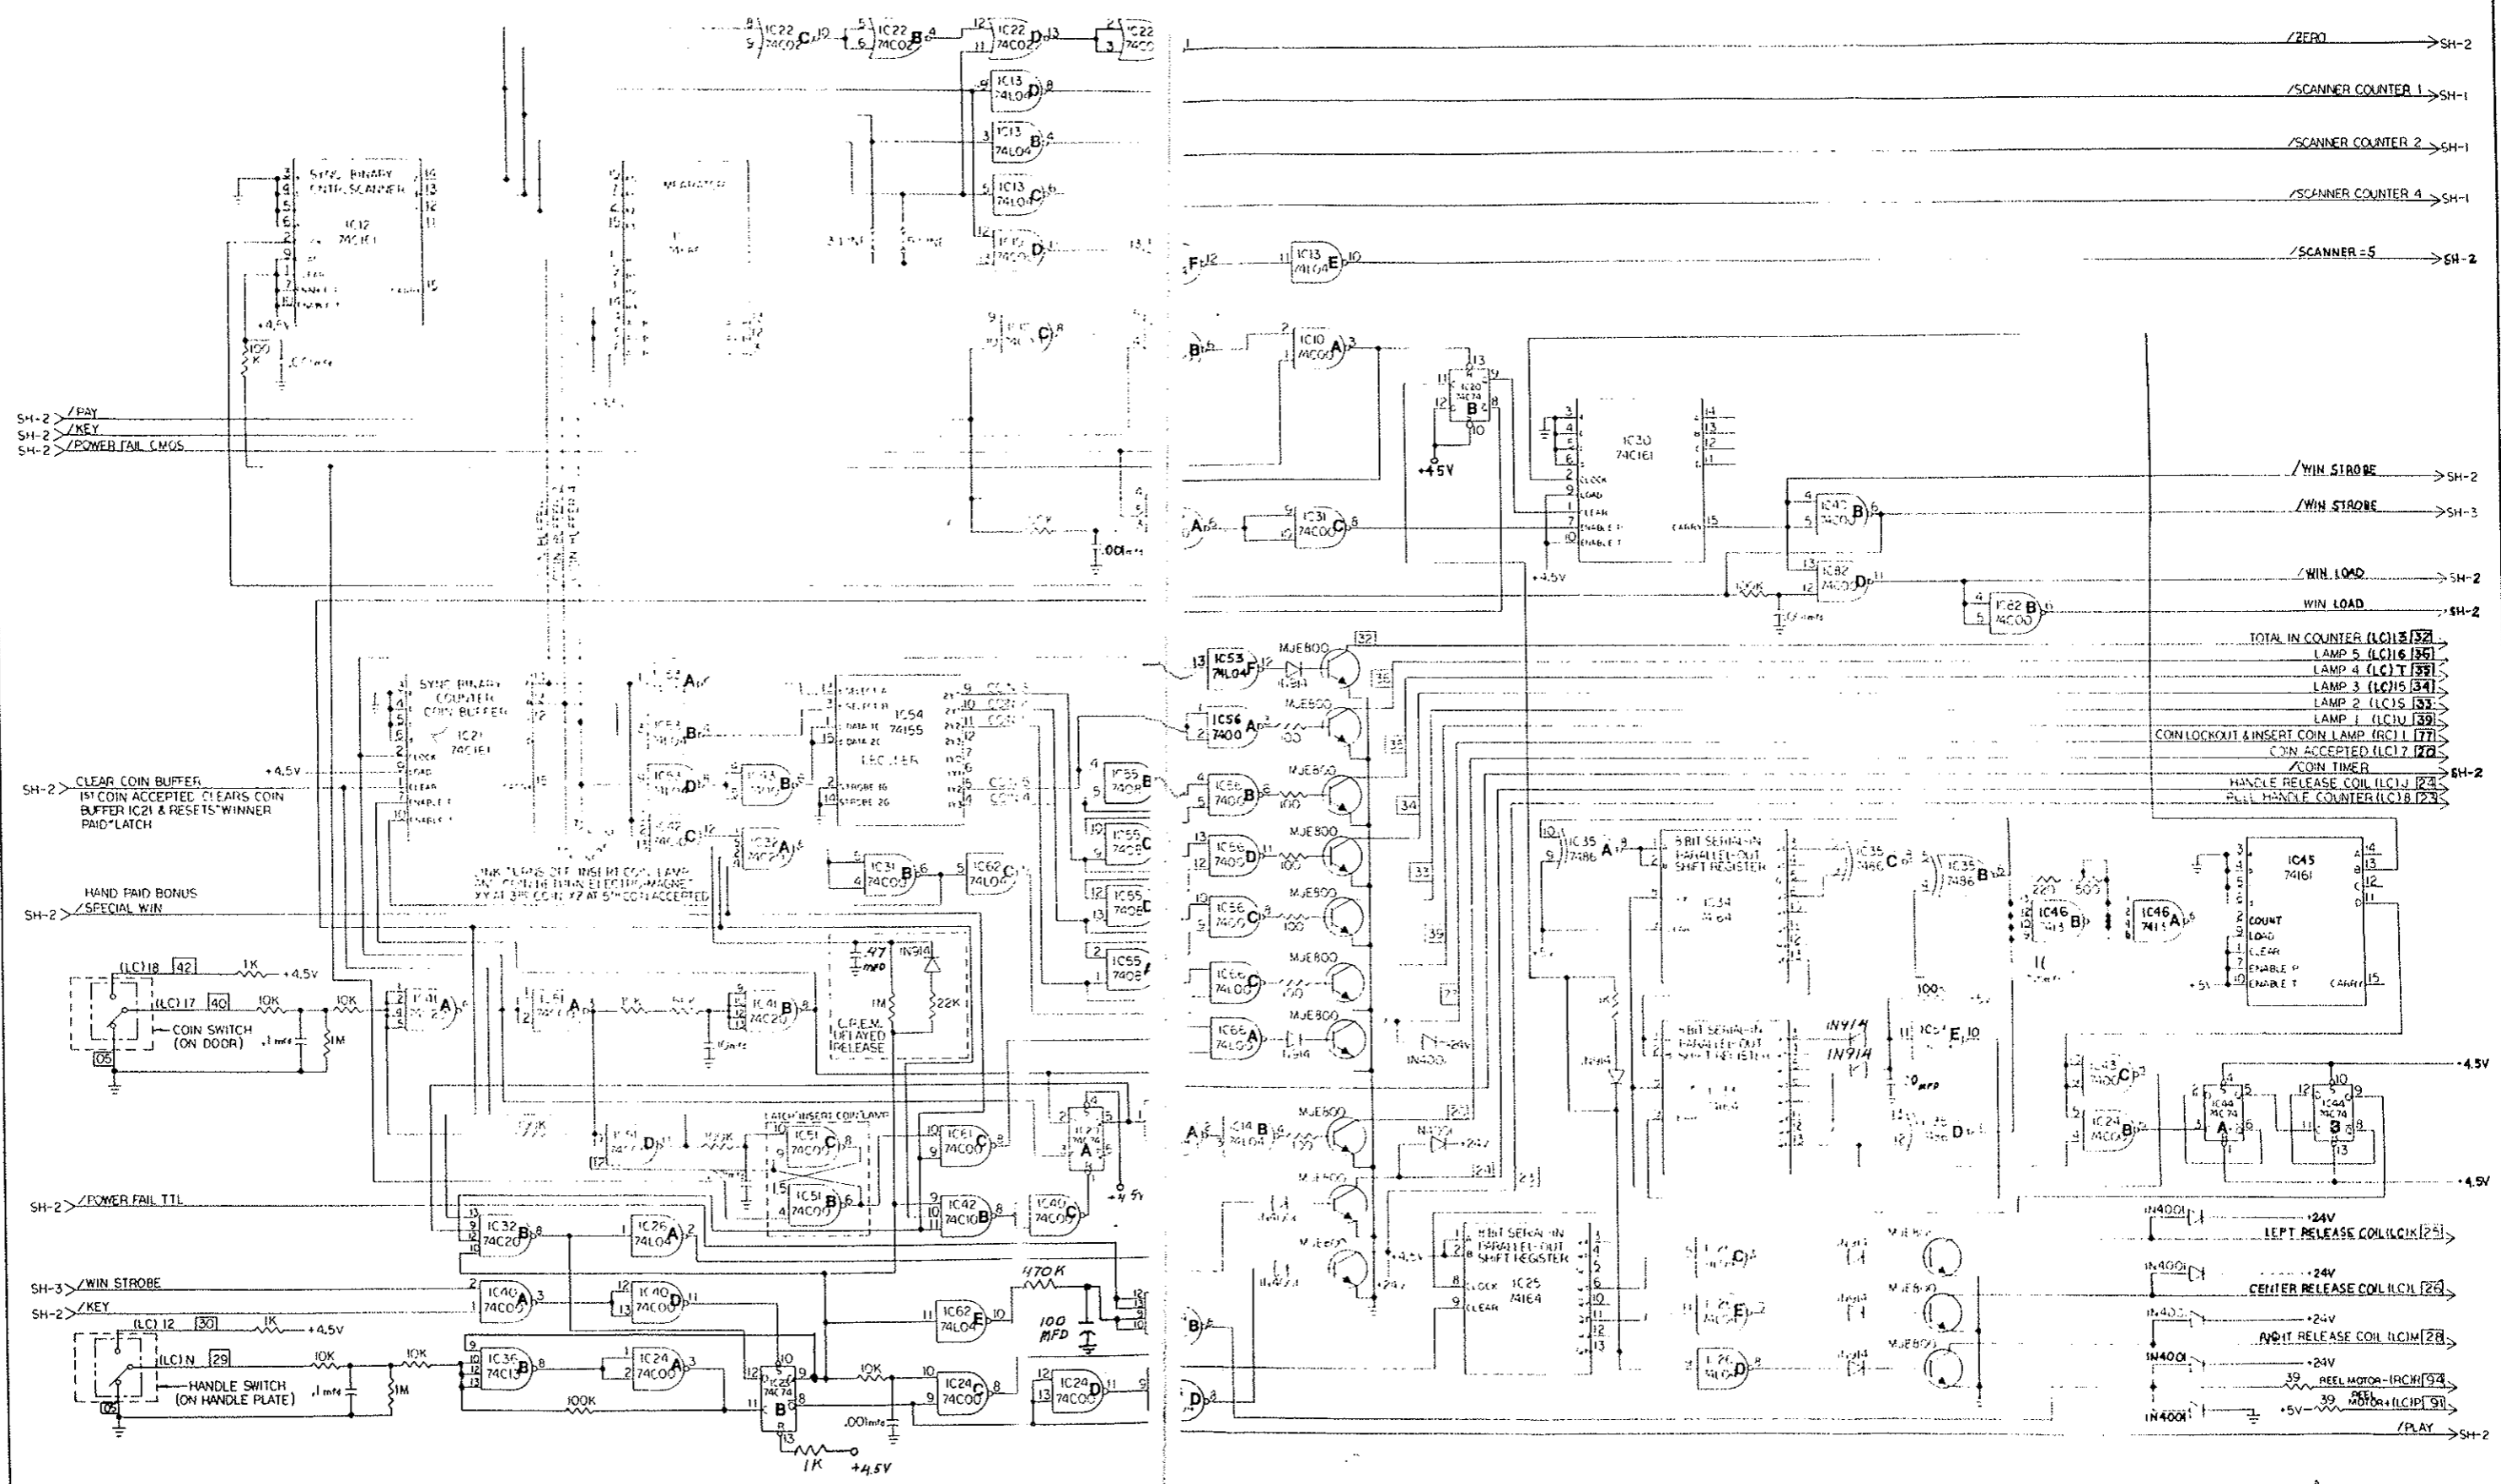

3 and 5 line
5HT 3A